

# JCPT0807DC

## Self-Propelled Scissor Lifts (Electric Motor Drive)



JCPT0807DC



S.W.L	230kg
S.W.L On Extension	113kg
Max. Occupants	2



A Working Height	7.80m
B Platform Floor Height	5.80m



C Overall Length	1.86m
D Overall Width	0.76m
Overall Height <sub>(Rails Up)</sub>	2.18m
E Overall Height <sub>(Rails Down)</sub>	1.84m
Platform Size <sub>(Length/Width F)</sub>	1.67mX0.74m
G Platform Extension Size	0.90m
Ground Clearance <sub>(Stowed)</sub>	0.09m
Ground Clearance <sub>(Raised)</sub>	0.019m
Wheelbase	1.36m
Turning Radius <sub>(Inside)</sub>	0m
Turning Radius <sub>(Outside)</sub>	1.64m



Drive Motors	24V/0.5kw
Lifting Motor	24V/2kw



Travel Speed <sub>(Stowed)</sub>	4.5km/h
Travel Speed <sub>(Raised)</sub>	0.8km/h
Up/Down Speed	27/22sec



Batteries	4X6V/210Ah
Integrated Charger	24V/25A



Gradeability	25%
Maximum Working Slope	1.5°/3°



Tyres	Φ305X100mm
-------	------------





Weight <sub>(CE / ANSI)</sub>	1415kg
-------------------------------	--------

### Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Drivable At Full Height
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Forklift Pockets
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails

### Options

- Overload Sensor With Alarm
- AC Power To Platform
- Platform Work Lights
- Airline To Platform

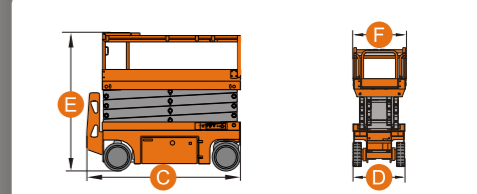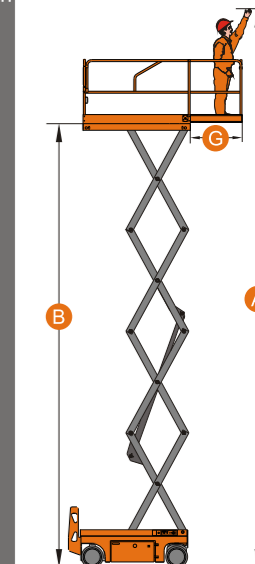

Folding Guardrails



Tight Turning Radius



Water Proof



Gradeability



Swing Out Tray



Emergency Lowering System



Pothole Device



Flashing Beacon