

S1930


NARROW SLAB SCISSORS

POWER IN EXPERIENCE

- Easiest 19' to service with 24 volt hardwired electric system
- Total access to all components
- Fully proportional drive & lift
- One of the most compact 19' scissors on the market

Snorkel

www.snorkelusa.com

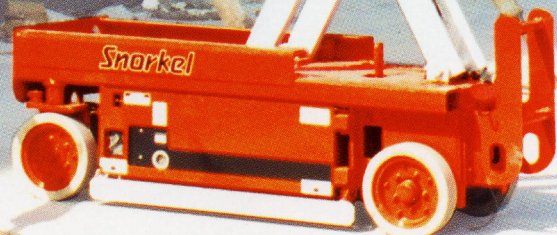

S1930

NARROW SLAB SCISSORS

PLATFORM

- A. Height 19" (5.8 m)
- B. Size 29" x 64" (74 x 163 cm)
- C. Guardrail Height 39" (99 cm)
- D. Rollout Extension 36" (91.4 cm)
- Capacity 500 lbs. (227 kg)
- Capacity on roll-out ext 250 lbs (113 kg)
- Stowed Platform Height 40" (101.6 cm)
- Toeboard Height 6" (15 cm)

MACHINE DIMENSIONS

- E. Overall Stowed Height 79" (201 cm)
- F. Overall Width 30" (76.2 cm)
- G. Overall Length 66" (168 cm)
- with step 74" (188 cm)
- H. Wheelbase 54" (137 cm)
- Weight 2,950 lbs (1336 kg)
- Ground Clearance
- Platform stowed,
- Pothole Protector raised 2-1/2" (7 cm)
- Ground Clearance
- Platform lowered,
- Pothole Protector lowered . . . 3/4" (1.9 cm)
- Gradeability 20%

PERFORMANCE


- Tire Size/Type 4 x 12 (Solid Rubber)
- Drive speed - Elevated 0.4 mph (0.6 kph)
- Drive speed - Stowed 1.2 mph (1.9 kph)
- Platform Lift speed 12 sec. minimum
- Platform lower speed 24 sec. minimum
- Turning Radius - outside . . . 64-1/2" (164 cm)
- Turning Radius - inside 5" (12.7 cm)

OPTIONS

- Swing gate
- Horn
- Flashing light
- Battery condition indicator

STANDARD FEATURES

- Pothole protection system
- Level sensor
- Joystick control on removable console
- 2-wheel parking brakes
- Scissor arm safety support
- Driveable at full height
- Center pivot-type steering
- Lanyard attachments points
- Fully proportional drive/lift
- Dual wheel drive system
- Drive motion alarm
- Swing-out trays
- Non-marking tires
- Battery powered with built-in smart charger
- Forklift loadable from 3 sides
- 125 volt GFCI AC outlet at platform

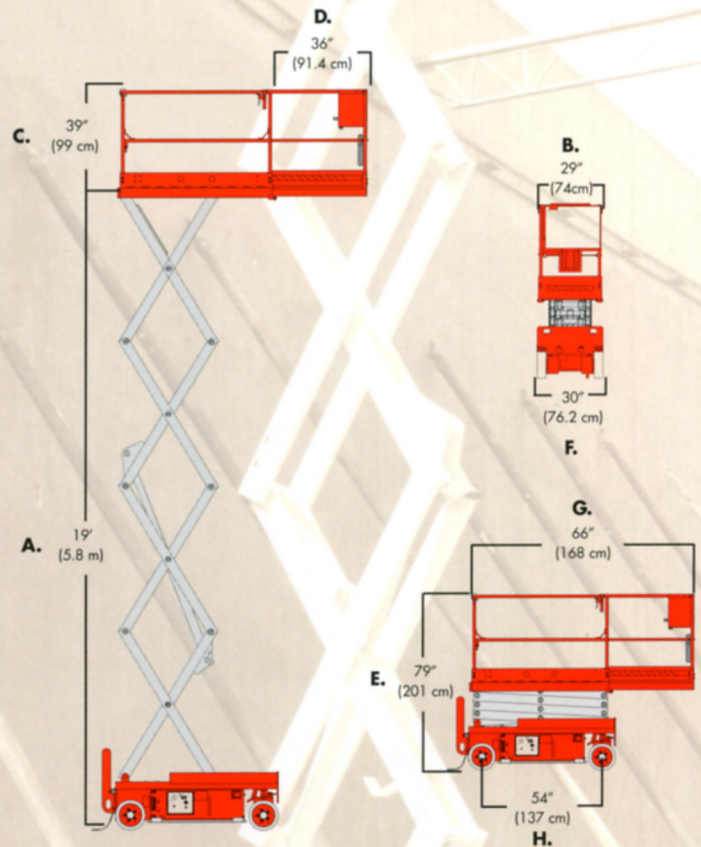

DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine.

Only qualified and trained operators are to be authorized to use and operate a work platform. Aerial work platforms must be elevated only on firm, level surface. Products in this brochure comply with applicable ANSI Standards.

This literature is for illustrative purposes only. Consult Operating Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

Snorkel

An ISO 9001 Registered Company
Printed in U.S.A. S1930 2-01

Corporate U.S.A.
P.O. Box 1160
St. Joseph, MO 64502-1160
800-255-0317 toll free
816-364-0317 Office
816-364-0380 Fax

England
Unit 30, Whitehill Industrial Estate
Whitehill Lane, Wootton Bassett
Wiltshire SN4 7SB, England
+44 1793 849905 tel
+44 1793 852918 fax

Australia
26 Redfern Street
Wetherill Park NSW
2164 Australia
(02) 9725 4000 tel
(02) 9609 3057 fax